

(19) World Intellectual Property
Organization
International Bureau



10/529855



(43) International Publication Date
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number
WO 2004/029001 A1

(51) International Patent Classification⁷: C05F 9/02, 17/02

NSW 2221 (AU). JACKSON, Mark [AU/AU]; 7/32 Wollie
Creek Rd, Banksia, NSW 2216 (AU).

(21) International Application Number:

PCT/AU2003/001249

(74) Common Representative: BIOSYS PTY LTD; ABN: 26
098 128 100, 279/353 King St, Newtown, NSW 2042 (AU).

(22) International Filing Date:

24 September 2003 (24.09.2003)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2002951743 27 September 2002 (27.09.2002) AU

(71) Applicant (*for all designated States except US*): BIOSYS
PTY LTD [AU/AU]; ABN: 26 098 128 100, 279/353 King
St, Newtown, NSW 2042 (AU).


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): CAMPBELL, An-
gus [AU/AU]; 325 Connells Point Road, Connells Point,

[Continued on next page]

(54) Title: ORGANIC WASTE TREATMENT APPARATUS

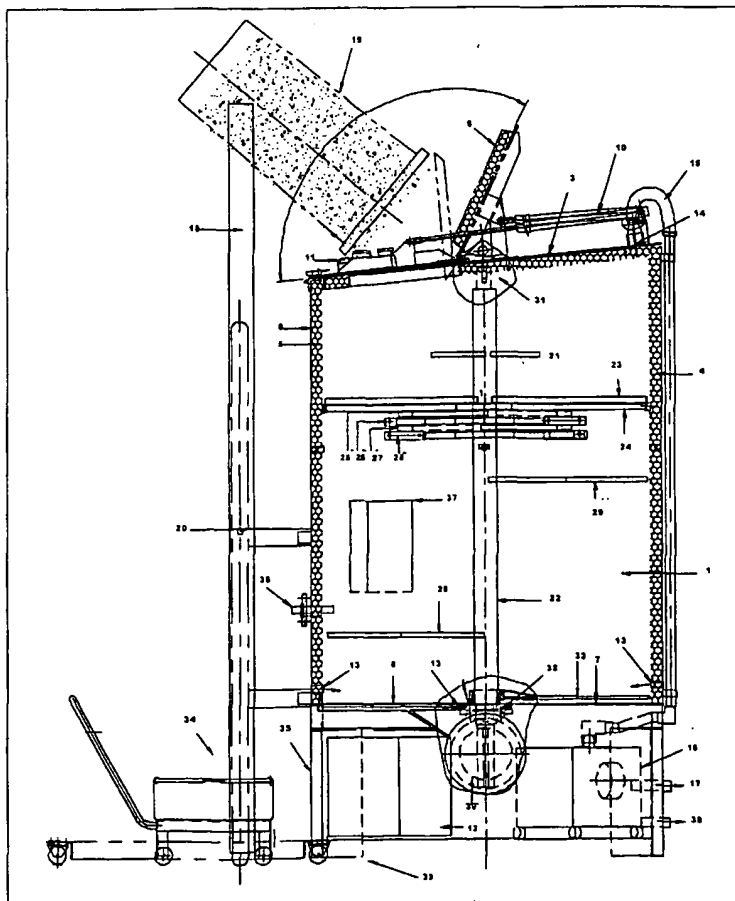

(57) Abstract: A composting system including a vertically-orientated vessel with a range of mechanisms attached to a vertically oriented central mounted rotating shaft, including rotatable size reduction blade(s), agitation mechanism(s), and discharge blade/mechanism(s). The composting system includes internal size reduction mechanism for reducing the size of waste and/or organic material introduced to the vessel. The composting system includes a loading hatch through which material may be introduced into the vessel, a discharge hatch through which material may be removed from the lower region of the vessel, and a source of air to maintain aerobic conditions within said vessel. When the apparatus is in use, material introduced to the vessel moves from the upper region of the vessel gravitationally and via agitation through a zone of size reduction to the lower region of the vessel. Process conditions within the vessel are controlled via intervention by an operator and via electronic control mechanism, which can monitor operating conditions such as temperature and loading rate (for example), to manage air injection, mechanical agitation and size reduction such that composting proceeds efficiently and at an optimal rate.

WO 2004/029001 A1

BEST AVAILABLE COPY



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Field of the Invention:

The present invention relates to the field of waste treatment, particularly food waste treatment. The present invention provides a novel waste treatment apparatus which may be used, for example, as an on-site waste treatment vessel at businesses where significant amounts of food waste are produced (eg accommodation enterprises, fruit and vegetable shops and markets, retirement villages and multi-unit dwellings, supermarkets, restaurants/cafes/cafeterias, government workplaces, and hospitals).

Background to the Invention:

Food waste and other putrescible organic waste is a major contributor to the cost of waste disposal. This is due largely to the present need to transport such wastes to specific landfill sites which are often at significant distances from the sites of the waste production. In addition, the disposal of wastes such as food waste and other putrescible organic waste is particularly undesirable due to their high water and nutrient content, leading to the release of organic acids and other compounds during anaerobic decomposition which are major contributors to the negative environmental impacts associated with landfills (Recycled Organics Unit, 2001a, *Greenhouse gas emissions from composting facilities*, Report for Central Coast Waste Board, NSW, September 2001). Indeed, food waste is the second largest source of methane in landfills (behind paper and cardboard) (US EPA, 1998, *Greenhouse gas emissions from management of selected materials in municipal solid waste*, United States Environmental Protection Agency.). The nutrients present in food waste also contribute to the high nutrient and heavy metal loadings in landfill leachate, and is a major contributor to groundwater and surface water contamination in regions with unlined landfills (Russel and Higer, 1988, *Assessment of groundwater contamination near Lantana landfill, southeast Florida*, Ground Water, 26(2): 156-164; Borden and Yunoschak, 1990, *Ground and surface water quality impacts of North Carolina sanitary landfills*. Water Resources Bulletin, 26(2): 269-277; Assmuth and Strandberg, 1993, *Groundwater contamination at Finnish landfills*, Water, Air and Soil Pollution, 69 (1/2):179-199).

In addition to the environmental concerns regarding the landfill disposal of putrescible food and organic wastes, in many countries including Australia, the available landfills are reaching capacity. For example, in Sydney, present landfill capacity for putrescible food and organic wastes in the Greater Sydney Region is expected to be

exhausted by 2011, based upon current levels of waste generation and recycling rates (Wright, 2000, *Independent Public Assessment – Landfill Capacity and Demand*, Report prepared for the Minister of Urban Affairs and Planning, State Government of NSW, September 2000). Such shortages of landfill sites, and the resistance of communities to the establishment of new landfill sites on health, environmental and monetary concerns, is urgently impelling the need to divert recyclable wastes from landfill. Indeed, many Governments have now developed policies to reduce landfill disposal of putrescible food and organic wastes (eg the NSW Government policies, 'Waste Not' Development Control Plan (DCP) and Waste Reduction and Procurement Policy). However, the meaningful implementation of these policies mandates the identification and development of practical alternatives to landfill disposal.

The present invention is directed at the provision of a simple and cost effective waste treatment apparatus, which may be readily used by waste producers, to decompose food and other putrescible organic wastes to a useful composted waste material product and thereby divert such wastes from landfill disposal. The composted waste material product can be used to improve soils, plants and the environment in which we live.

There are four main types of composting systems that have been devised for commercial purposes, however, hybrid systems are also available. The four main systems can be categorised as follows:

A windrow system: this is an open system and the material to be composted is piled in long rows. These are aerated by forced convection or by frequent turning using a mechanical agitator system.

An enclosed static stack system: air is forced up through the pile of the material to be composted, which is enclosed in some type of vessel. This is a batch process in which the vessel is loaded and unloaded once for each composting cycle.

An agitated bay system: these systems primarily utilise U-shaped channels or bays. Material to be composted is often added semi-continuously and periodically agitated and moved by mechanical means. However, primary aeration is often achieved via forced air movement.

Continuous or semi-continuous in-vessel composting systems: in these systems the material to be composted is fed in one end (side, top or bottom) of the composting systems and exits continuously from the other.

Numerous examples of the above systems are currently being produced and are illustrated in "The Practical Handbook of Compost Engineering", Roger T Haug, Lewis Publishers, 1993 (ISBN 0-87371-373-7).

5 An object of the present invention is to provide an in-vessel, semi-continuous and generally vertical composting system, which provides an efficient alternative to existing composting systems.

Summary of the Invention:

Thus, in a first aspect, the present invention provides an apparatus for aerobically
10 composting waste material, the apparatus comprising;
a vertically-orientated vessel comprising a top wall, base wall and side wall(s)
defining an interior vessel space,
size reduction means for reducing the size of waste material introduced to the
vessel, wherein said means divides the interior vessel space into upper and lower regions,
15 a loading hatch through which waste material may be introduced to said upper
region of the vessel,
a discharge hatch through which waste material may be removed from the lower
region of the vessel, and
a source of oxygen to maintain aerobic conditions within said vessel,
20 wherein, when the apparatus is in use, waste material introduced to said vessel
gravitationally moves from said upper region through the size reduction means to said
lower region.

The vertically-orientated vessel may be constructed of any suitable material, but is preferably constructed of stainless steel or like corrosion-resistant material. The walls, and
25 particularly the side wall(s), are preferably insulated so as to retain heat generated by aerobic composting of introduced waste material. The volume of the internal vessel space is preferably within the range of 1.5 to 5.0 m³, more preferably, 2.0 to 3.0 m³. In a particularly preferred embodiment, the volume of the internal vessel space is about 2.5 m³. This volume is sufficient to enable an apparatus according to the present invention to
30 compost about 1230 kg of food waste material per week.

The size reduction means is provided so as to reduce the size of introduced waste material to particles/pieces of an average diameter/dimension size of approximately 2 to

10mm. It has been found that by reducing the size of introduced waste material to particles/pieces greatly increases the rate of composting which may be achieved and assists in the production of a well mixed and uniform, composted product. The size reduction means also assists in the thorough mixing of the introduced waste material. The apparatus is preferably arranged so that all waste material must pass through the size reduction means when passing from the upper region to the lower region of the vessel.

The size reduction means preferably comprises a plurality of blades or cutting edges. The blades or cutting edges do not need to be sharp as the size reduction may be achieved through mechanical shearing and tearing. The blades or cutting edges may therefore take the simple form of flat bars, preferably with bevelled edges and/or sharp edges. Preferably, at least one of the blades or cutting edges is adapted for movement (eg by horizontal rotation). More preferably, the size reduction means comprises two or more, horizontally rotatable blades or cutting edges, and two or more fixed (eg mounted to the side wall(s)), horizontally disposed and parallel blades or cutting edges, wherein at least one of the horizontally rotatable blades or cutting edges rotates within a parallel space between two of said fixed blades or cutting edges. Preferably, the parallel space between said two of said fixed blades or cutting edges is in the range of 10 to 200 mm in width, more preferably 100 to 150 mm in width. The width of the rotatable and fixed blades or cutting edges may be substantially alike and, preferably, is within the range of 50 to 100 mm. The blades or cutting edges may be constructed of any suitable material, but are preferably constructed of stainless steel or like corrosion-resistant material.

The loading hatch may be located in the side wall(s) adjacent to the top wall, but more preferably, is located in the top wall. The loading hatch may be conveniently adapted for controlled or automated opening and closing. Preferably, the loading hatch, when closed, forms an air-tight seal to prevent escape of any odourous gas or "process air" from the vessel.

The discharge hatch may be located in the side wall(s) adjacent to the base wall, but more preferably, is located in the base wall. The discharge hatch may be conveniently adapted for controlled or automated opening and closing. Preferably, the despatch hatch, when closed, forms an air-tight and liquid seal to prevent escape of any odourous gas or process air and liquids (ie leachates) from the vessel.

The apparatus is provided with a source of oxygen (eg a source of compressed air), to maintain aerobic conditions within the vessel. This is important in order to achieve composting by aerobic microorganisms rather than anaerobic microorganisms which tend to produce greater quantities of odourous gas. The supply of oxygen may be controlled or automated so as to provide sufficient oxygen to maintain the optimum temperature and oxygen conditions in the vessel for composting by aerobic mesophilic and thermophilic microorganisms (eg temperature of about 50 - 55°C). Automated control of oxygen supply may be achieved by providing a temperature sensor within the vessel. When the temperature drops to below a first set temperature (eg 45°C), as measured by the temperature sensor, the supply of oxygen is activated in a manner that causes an increase in temperature to approximately 50°C. Also, when the temperature increases to above a second set temperature (eg 60°C), as measured by the temperature sensor, the supply of oxygen is activated to blow off excess heat until a temperature of approximately 55°C is achieved. The temperature sensor is preferably located in the lower region of the vessel in a position within 250 - 450 mm of the base wall. Supplied oxygen enters the vessel by one or more inlets, which are preferably located in the side wall(s) adjacent to the join with the base wall and also in a central location in the base wall. The apparatus is provided with at least one outlet, preferably located in or adjacent to the top wall, to discharge odourous gas or process air from within the vessel. This process air may be discharged to the atmosphere via vent or via an odour scrubber to remove any odourous gases.

The movement of said blades or cutting edges adapted for movement is conveniently achieved by mounting the blades or cutting edges on a rotatable shaft, having a vertical axis of rotation, which is preferably mounted on the base wall and, preferably, the top wall, such that the rotatable shaft rotates centrally within the vessel. The rotatable shaft may be constructed of any suitable material, but is preferably constructed of stainless steel or like corrosion-resistant material. The rotatable shaft may be driven by any suitable means (eg an electric motor), and may be adapted for continuous operation or, more preferably, controlled and/or automated, intermittent operation. The rotation of the rotatable shaft may be at a speed within the range of 5 to 60 rpm, but more preferably, within the range of 10 to 30 rpm.

Such a rotatable shaft may also be provided with fittings, other than the one or more blades or cutting edges. For example, on a portion of the rotatable shaft that resides within

the upper region of the vessel, there may be provided one or more spreader or mixer bar(s) to assist in evenly distributing and mixing introduced waste material. Also, on a portion of the rotatable shaft that resides within the lower region of the vessel, there may be provided one or more mixing bar(s) to ensure that the waste material in the lower region of the vessel is moved by agitation therefore ensuring even and consistent flow of composting materials. Further, on a portion of the rotatable shaft adjacent to the base wall, there may be provided one or more sweeper bar(s) or plate(s) to sweep composted material adjacent to the base wall towards and out of the discharge hatch. The rotatable shaft preferably operates both in a clockwise and anti-clockwise direction, and all rotating bars and blades or cutting edges are preferably symmetric in plan view to allow for effective action in both directions.

In a second aspect, the present invention provides a method of producing a composted product, said method comprising;

introducing waste material into an apparatus for aerobically composting waste material, said apparatus comprising a vertically-orientated vessel comprising a top wall, base wall and side wall(s) defining an interior vessel space, the interior vessel space being divided into upper and lower regions by a size reduction means for reducing the size of waste material introduced to the vessel, and wherein the introduction of waste material is to the upper region of the vessel, and

maintaining within said vessel conditions suitable for aerobically composting of said waste material.

Preferably, the waste material is introduced to the vessel with a suitable adsorbent or adsorbent material (eg wood shavings or sawdust) to reduce any excess amounts of moisture or liquids in the waste material. The waste material may be, if desired, pre-mixed with the adsorbent or absorbent material prior to introduction into the vessel. Preferably, the adsorbent or absorbent material and waste material is introduced into the vessel in a ratio (on a weight to weight basis) of 1:8 to 1:2, more preferably, 1:4 to 1:5.

In a third aspect, the present invention provides a composted product produced in accordance with the method of the second aspect.

Throughout this specification the word "comprise", or variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated element,

integer or step, or group of elements, integers or steps, but not the exclusion of any other element, integer or step, or group of elements, integers or steps.

Any discussion of documents, acts, materials, devices, articles or the like which has been included in the present specification is solely for the purpose of providing a context
5 for the present invention. It is not to be taken as an admission that any or all of these matters form part of the prior art base or were common general knowledge in the field relevant to the present invention as it existed in Australia before the priority date of each claim of this application.

10 **Brief description of accompanying figures:**

Figure 1 shows a longitudinal section view of an organic waste treatment apparatus according to the present invention.

Figure 2 provides a plan view of a particular embodiment of a size reduction means which may be employed in an organic waste treatment apparatus shown in Figure 1. The
15 embodiment comprises spiked, fixed and rotating size reduction blades.

Figure 3 provides graphical results of temperature and interstitial oxygen concentration changes during a 7 week composting trial of the apparatus described in Example 1. In this trial, a temperature feedback mechanism provided in the apparatus was programmed to a set-point of 50°C.

20 Figure 4 provides graphical results of temperature and interstitial oxygen distribution at different depths in the composting chamber during a 7 week composting trial of the apparatus described in Example 1. The results shown are typical of that generated over the duration of the trial. (A) 300 mm from the top of the composting mass, (B) middle of the chamber (900 mm above base), and (C) bottom of chamber (300 mm
25 above base).

Detailed disclosure of the Invention:

Figure 1 shows a waste treatment apparatus or compostor according to the present invention. The apparatus comprises a generally cylindrical vessel or chamber (1) with insulated side walls (2) and top wall or ceiling (3) comprising a suitable insulation material (4) (expanded fibreglass batts) sandwiched between an inner vessel (5) generally constructed of stainless steel or like corrosion-resistant material and an outer shell (6). The chamber further comprises a base (7), also constructed of stainless steel or like corrosion-resistant material, including a discharge outlet or hatch (8). When closed, the discharge hatch forms an air and liquid tight seal. The ceiling (3) of the chamber (1) is provided with a loading hatch (9) which closes in an air-tight manner. The loading hatch may be operated manually, or automatically by a pneumatic cylinder (10) controlled via a simple switch (11). With the discharge and loading hatches (8, 9) closed, the chamber (1) is substantially sealed from the atmosphere.

The chamber (1) is provided with a source of compressed air (12) (eg an air compressor or cylinder of compressed air) which provides air, under positive pressure, through a number of inlets (13) located in the lower regions of the side walls and via the lower bearing housing in the base (7). In the ceiling (3), an outlet (14) is provided for escape or removal of process air and gases. The outlet (14) may be connected directly to atmosphere via a vent stack, or may be piped in communication (15) with a scrubber (16) for removal of odours from the process air and gases, and an air/gas discharge outlet (17) to the atmosphere. The scrubber may be in communication with a condensate discharge outlet (18).

The exterior of the chamber (1) may be equipped with an automated bin loading mechanism (18) (eg a garbage bin lifting mechanism) to introduce waste materials directly from a bin (19) into the chamber (1) through the loading hatch (9). The exterior of the chamber (1) may also be equipped with a ladder (20) to provide ready access by an operator.

In the interior of the chamber (1), at a position adjacent to the loading hatch, is provided one or more a spreader or mixer bar(s) (21) to assist in evenly distributing and mixing introduced waste materials across the area of the upper section of the chamber (1). The spreader bar(s) (21) are perpendicularly mounted upon a rotatable, centrally located, vertical shaft (22), so that the spreader bar(s) are slowly rotated (eg 10 to 30 rpm). Below

the spreader bar(s) (21), are provided fixed and/or moving blades or cutting edges (23-28) which reduce the size of the waste material and achieve further mixing. In the embodiment shown in Figure 1, these blades or cutting edges comprise: a pair of blades (23) perpendicularly mounted upon the rotatable shaft (22) and which extend such that the distal ends of the blades are closely adjacent to the side walls (2) of the chamber (1); a plurality of blade pairs (25, 27) mounted to the rotatable shaft of a lesser extension to the pair of blades (23); and a plurality of fixed blades (24, 26, and 28) mounted to the side walls (2) of the chamber (1). All spreader bar(s) and blades are constructed of stainless steel or like corrosion-resistant material. The fixed and rotatable blades (23-28) cooperate to ensure that the waste material is reduced to particles or pieces of small dimension (typically 2 to 10 mm in length or diameter), and thoroughly mixed, thereby maximising exposure of the putrescible and compostable waste material to the mechanical and biological processes within the chamber. The fixed and rotatable blades (23-28) also ensure that any biodegradable plastic packaging material present in the waste material is torn or shredded into particles or pieces of small dimension. To assist with the tearing or shredding of biodegradable plastic packaging, at least one of the blades or cutting edges may be provided with short spikes (Figure 2).

Further rotatable mixing bar(s) (29) may be provided to ensure that the waste material that has passed through the fixed and rotatable blades or cutting edges (23-28) are moved by agitation.

The rotatable shaft (22) is driven by any conventional means such as a drive motor (30) equipped with a gearbox to allow clockwise and anti-clockwise rotation. Bearing housings (31, 32) are shown below the ceiling (3) of the chamber (1) and below the base (7).

At the base (7) of the chamber (1), there is provided a discharge mechanism comprising a sweeping bar or plate (33) mounted to the rotatable shaft (22) which sweeps composted product towards and out of the discharge hatch (8) for discharge to a collection bin or trolley (34) which may be positioned under the chamber (1) and between the chamber support legs (35).

The chamber is further provided with a wall mounted thermistor probe (or equivalent) (36), which is connected to an electronic control mechanism in a control box (37). This provides a temperature feedback mechanism which monitors the temperature of the composting waste material and supports automated control of compressed air supply

to the chamber (1) via the air compressor (12) and associated air inlets (13). The control box (37) is preferably lockable and contains electronic componentry to control the composting process, and a safe and user friendly interface for the operator (control panel). The drive motor (30) for the sweeping bars (33), blades (23-28), spreader bar(s) (21) and mixing bar(s) (29) can be controlled by the operator at the control box (37), and/or automatically via a timer mechanism. In addition, the air compressor (12), which forces air under positive pressure into the composting waste via the air inlets (13), can also be controlled manually by the operator via the control box (37), and/or automatically via the temperature feedback mechanism described above.

10 The chamber operates under continuous (or plug) flow principles. In use, food waste or other putrescible organic waste is introduced into the chamber (1) through the loading hatch (9) onto an existing composting mass of previously introduced waste. The wastes may be introduced with an absorbent or absorbent material such as wood shavings or sawdust. The chamber (1) is preferably filled to a level just above the spreader bar(s) (21). The loading hatch (9) (and discharge hatch (8)) is then closed and the composting process commenced by activating the electronic control mechanism at the control box (37). Composted product may be removed from the chamber through the discharge hatch (8) to create additional space in the lower region of the chamber (1). The removal / discharge of composted product allows the composting mass to move lower into the chamber (1) under the force of gravity and mechanical agitation, creating space in the upper region of the composting chamber for the addition of more waste material. The spreader bar(s) (21), blades (23, 25, and 27), and mixing bar(s) which are mounted to the rotatable shaft (22) rotate in unison once the chamber is sealed and the composting process activated at the control box (37). The rotation, and direction of rotation, of the rotatable shaft (22) is operated automatically via an electronic timing mechanism so as to operate throughout the day for short periods of time. The rotation, and direction of rotation, of the rotatable shaft can be manually or automatically operated via the control box (37). In operation, the spreader bar(s) (21) mixes and spreads the recently loaded waste material evenly above the cutting blades (23-28). The blades (23-28) cooperate to form a "size reduction zone" through which all waste material must pass and which reduces the particle/ piece size of the waste material, and destroys any containers or packaging present so as to expose the waste material to the mechanical and biological processes within the chamber (1). That is,

the size reduction increases the surface area for microbial decomposition of the waste material, and results in more rapid composting. Further mixing and agitation of waste material occurs at various levels throughout the composting chamber (1).

Temperature is sensed by a thermistor probe (36) and monitored by the automated
5 electronic control mechanism in the control box (37). The air compressor (12) is activated automatically in response to temperature in order to maintain a consistent temperature within the composting waste material mass of about 55°C which is characteristic of the optimum rate of aerobic microbial decomposition. The air compressor (12) can also be operated manually by the operator (ie to allow for intervention, for example, where
10 excessively wet waste material has been loaded such that there is a need for additional aeration to drive off excess moisture) via the control box (37). The controls are, however, usually and conveniently set to "auto" so that aeration can be managed automatically by the temperature feedback mechanism described above. When the thermistor probe (36) senses a change in chamber temperature to less than 50°C, the temperature feedback
15 mechanism results in the addition into the chamber (1) of compressed air from the air compressor (12) via air inlets (13) located in the base (7) adjacent to the side walls (2) and in the lower bearing housing (32) so as to maintain optimal aerobic conditions throughout the composting mass. Since the chamber is also insulated to retain heat, the chamber is able to be operated to maintain substantially optimal aerobic and thermophilic conditions, thereby
20 ensuring pasteurisation and maximising the rate of composting of the waste material.

The placement of one or more air inlets (13) in the lower bearing housing (32) also assists in keeping the housing (32) free of waste material.

Air which has passed through the waste material contained within the chamber (1) is forced from the top or headspace of the chamber (1) under positive pressure through the
25 outlet (14) and ducting (15) to direct discharge to atmosphere via a vent stack, or to an odour scrubber (16) for treatment prior to discharge. A corrosion resistant fan is typically provided to assist in drawing air out of the headspace of the chamber (1) to the scrubber (16). Moisture in the process air condenses into liquid upon cooling in the ducting and is removed via the condensate discharge outlet (38), which can be plumbed directly into a
30 sewer if required (usually only if an odour treatment unit is installed).

Composted product can be removed from the base (7) of the chamber (1) through the discharge hatch (8) to fall freely into a discharge collection bin or trolley (34). The sweeping bar(s) (33) actively discharges composted product from the discharge hatch (8).

The present invention allows the provision of a self-contained and automated waste material handling and processing system which may be used on-site (eg accommodation enterprises, fruit and vegetable shops and markets, retirement villages and multi-unit dwellings, supermarkets, restaurants/cafes/cafeterias, government workplaces, and hospitals). The system allows for the efficient conversion of putrescible food and organic wastes (eg food, meat and other high strength wastes, sawdust and wood shavings, and pre-shredded paper and cardboard packaging wastes) into a composted waste material product for garden or agricultural use.

The invention will hereinafter be further described by way of the following non-limiting example.

15 **Example 1:**

MATERIALS AND METHODS

Description of the apparatus and process.

A trial was conducted to objectively characterise the performance of an organic waste treatment apparatus according to Figure 1, in terms of processing performance (ie retention time and processing capacity), product quality and stability, and associated environmental impacts (eg odour, pests and leachate).

The apparatus was designed for on-site conversion of food waste into a saleable composted waste material product, which would be capable of being operated by a single user.

25 The apparatus comprised a composting chamber with an internal volume of 2.4 m³. The apparatus was provided with an analogue temperature feedback mechanism (comprising a digital thermostat controller) controlled the injection of compressed air from two reciprocating air compressors via a ring main installed on the bottom outer perimeter of the composting chamber and into a bearing housing at the base of a central rotatable shaft. Injection of air occurred continuously until the composting mass reached a temperature of 50°C, at which point it was turned off, to allow composting to proceed optimally. Fixed cutting blades were fitted with short spikes to assist in the shredding and

tearing of biodegradable plastic bags, so as to ensure that if any bags of this kind were introduced into the chamber, then they would be shredded or torn and thereafter evenly mixed into the composting mass. Three sickle shaped mixing bars mounted on the central rotatable shaft of the apparatus were provided to assist in mixing of the composting mass.

- 5 The size reduction means and mixing system was operated at 30 rpm and was driven by a 11 kW electric motor housed beneath the chamber. Mixing of the composting mass was automatically controlled to provide mixing for approximately 60 seconds once a day.

Source separated food waste was collected in 80, 120 or 240 L wheelie bins and loaded into the composting chamber of the apparatus via a loading hatch with an
10 integrated 150 kg lift capacity electrically-driven bin-lift unit.

Feedstock collection and preparation.

Combined pre- and post- consumer food waste was sourced from a commercial catering enterprise in 120 L wheelie bins that were lined with Biocorp™ biodegradable bags (corn starch polymer based). Approximately 1 tonne of food waste was collected per
15 week, and was temporarily stored in a cool room at 2°C prior to transport and loading into the apparatus.

Wood shavings in 240 L chaff bags was used as a bulking agent to assist in the composting of the food waste to increase the carbon:nitrogen (C:N) ratio and to reduce the moisture content. The moisture content and C:N ratio of a representative 1 L sample of
20 food waste and wood shavings was determined according to Australian Standard AS 4454 (1999). This data was used to prepare a waste mix to achieve a C:N ratio of 20:1 and a moisture content of approximately 65-68%, which is the upper maximum for rapid composting.

Operation of the Apparatus.

- 25 Approximately 210 kg wood shavings and 1000 kg food waste was loaded into the apparatus so that approximately 80% of the chamber was filled with the waste mix. All materials were weighed on a Wedderburn 100 kg platform scale prior to loading. To ensure that an appropriate composting waste material mix was obtained, one (weighed) 240 L bag of wood shavings was loaded into a 240 L wheelie bin and deposited into the
30 apparatus via the bin lift. This was followed by approximately 100 kg food waste (approximately 1.5 120 L wheelie bins), with continuous mixing. The food waste was layered in the unit until all materials were loaded, under constant agitation via the internal

mixing system to ensure that the food waste was fully incorporated into the wood shavings, and to ensure that the food waste was size reduced (particularly for hard food waste components, such as pumpkins).

5 The apparatus was left for one week to build up temperature before regular re-loading occurred.

Based on the volume on the composting chamber, initial density of the food waste/ wood shaving mix, and the volume reduction following mixing and size reduction, it was calculated that the apparatus composting vessel could process up to approximately 1230 kg of food waste per week.

10 A loading schedule was then developed so that a range of samples could be extracted from the vessel with different retention times. The planned loading schedule is shown in Table 1 below.

15 Table 1. Planned food waste loading schedule to determine processing performance of the apparatus and resulting product quality at a range of retention times from approximately 1 to 4 weeks.

| Week ending | Food waste loaded (kg) | Wood shaving loaded (kg) | Total material loaded (kg) | Estimated retention time (days) | Estimated retention time (weeks) |
|-------------|------------------------|--------------------------|----------------------------|---------------------------------|----------------------------------|
| 1 | 1 000 | 215.2 | 1 215.2 | 8.6 | 1.2 |
| 2 | 700 | 150.6 | 850.6 | 12.3 | 1.8 |
| 3 | 500 | 107.6 | 607.6 | 17.2 | 2.4 |
| 4 | 300 | 64.6 | 364.6 | 28.1 | 4.0 |
| 5 | 300 | 64.6 | 364.6 | 28.1 | 4.0 |
| 6 | 300 | 64.6 | 364.6 | 28.1 | 4.0 |
| 7 | 300 | 64.6 | 364.6 | 28.1 | 4.0 |

20 To reduce labour requirements, food waste and wood shavings were loaded once per week with the desired weekly quantity. After the loading of each batch, the apparatus was sealed and left to process the food waste and wood shavings mixture. After each loading, plastic markers were added to the top of the composting waste material mass in

the upper region of the chamber so that individual loadings could readily be identified on discharge of the composted waste material product.

An extended processing duration for the lower loading rates was performed (ie 300 kg/week for weeks 4-7) as it was estimated that at least 4 weeks would be required from the loading until the waste material travelled through the chamber to be available for discharge.

Samples of composted waste material product representing a retention time of approximately 1, 2, 3 and 4 weeks duration were extracted from the unit on weeks 2, 3, 4 and 7.

Approximately 5 L of composted waste material product was representatively sampled, bagged and stored at 0°C prior to analysis for pH, electrical conductivity and moisture content according to Australian Standard AS 4454 (1999). A sample after one week retention time was analysed for compliance as a pasteurised mulch according to Australian Standard AS 4454 (1999).

Apparatus performance analysis.

Temperature and interstitial oxygen profiles were recorded with a galvanic cell type combined oxygen/temperature probe (Demista®, USA) over the 7 week trial to determine the efficiency of the aeration and temperature control system. Temperatures and interstitial oxygen profiles were taken at 300, 600 and 900 mm from the central rotatable shaft at various depths in the chamber to characterise the temperature and oxygen profiles in vertical and horizontal sections of the chamber.

The percentage of time that the air compressors were operating to maintain the thermostat set point temperature of 50°C was determined by fitting a Dickson S120 temperature data logger into the process air outlet. Changes in the temperature of the process air indicated when the air compressors were operational and blowing off heat from the composting waste material mass.

A number of qualitative observations were also made to characterise the performance of the apparatus during the trial, including whether air or leachate leaked through the discharge hatch; the presence or absence of leachate at the base of the apparatus; ease of loading materials into the loading hatch with the bin lift; ease of discharge of compost into the discharge trolley; electrical current draw by the drive motor; efficiency of the size reduction and mixing system, and odour level emitted by the gas

cleaning unit prior to discharge to the atmosphere.

RESULTS AND DISCUSSIONS

Chemical and physical characteristics of feedstock materials.

The chemical and physical characteristics of food waste (including meat, dairy and seafood fractions), wood shavings and the combined food waste / wood shavings feedstock mix is shown in Table 2. As expected, the moisture content of food waste alone was very high - 79.8%. This high moisture content was in part due to the fact that the food waste stream comprised post-consumer food waste, including pasta and cream / meat sauces. Due to the high moisture content and poor structure, addition of a carbonaceous bulking agent was highly preferred so as to absorb excess moisture, increase the C:N ratio, and to increase the air-filled porosity of the mix to ensure that adequate air flow and adequate composting can take place (Jackson and Line, 1998, *Assessment of periodic turning as an aeration mechanism for pulp and paper mill sludge composting*, Waste Management and Research, 16(4): 312-319).

Table 2. Chemical and physical characteristics of individual and combined feedstocks processed in the trial over an 8 week period.

| Feedstock Component | Moisture content (% w/w) | pH | Electrical Conductivity (dS m ⁻¹) | Organic Carbon (% w/w) | Total Nitrogen (% w/w) | C:N ratio | Bulk density (kg m ³) |
|-----------------------|--------------------------|-----|---|------------------------|------------------------|-----------|-----------------------------------|
| Food waste | 79.8 | 5.0 | 4.45 | 54.6 | 5.20 | 10.6 | 658.5 |
| Wood shavings | 14.8 | 6.3 | 0.02 | 57.5 | 0.09 | 641.0 | 75.9 |
| Food waste + shavings | 68.9 | 5.5 | 0.92 | 56.1 | 2.80 | 20.0:1 | 430.2 |

20

Addition of wood shavings also slightly increased the pH of the food waste, and significantly reduced the electrical conductivity of the food waste component. The pH and electrical conductivity of the food waste/wood shavings mix were ideal for rapid composting (Miller, 1993, *Composting as a process based on the control of ecologically selective factors*, In: F. Blaine Metting Jr. (ed.), *Soil Microbial Ecology: Applications in Agricultural and*

25

Environmental Management, Marcel Dekker Publishing, New York, pp 515-544). Wood shavings were also found to be very effective in absorbing excess moisture released by the food waste fraction, making it more amenable to composting, and also advantageously avoiding the potential for leachate formation. Leachate can be a major problem for waste management, as the leachate can be odorous, unsightly, can attract pests/vermin and has a high biological oxygen demand, making it difficult to handle.

Table 3. Feedstock recipes for processing food waste at different C:N ratios in the apparatus. Addition of greater quantities of food waste to achieve a C:N ratio less than 20:1 is not advisable due to the potential for leachate formation in the bottom of the composting chamber. This would increase the moisture content of the processed compost, making it difficult to store and handle.

| Food waste (kg) | Wood shavings (kg) | C:N ratio | Moisture Content (%, w/w) |
|-----------------|--------------------|-----------|------------------------------|
| 100.0 | 21.5 | 20:1 | 68.9 |
| 100.0 | 26.2 | 22:1 | 67.0 |
| 100.0 | 30.8 | 24:1 | 65.2 |
| 100.0 | 35.5 | 26:1 | 63.6 |

Size reduction of feedstocks, materials movement in the chamber and discharge efficiency.

The series of cutting blades with exterior spikes was very effective in size reducing all food waste material loaded into the chamber. This included very hard components, such as avocado seeds and whole pumpkin, also biodegradable plastics bags and packaging materials.

Size reduction and mixing of incoming food waste and wood shavings was achieved rapidly within a 15 second period. The size reduction and mixing system was also very effective in thoroughly incorporating the food waste into the wood shavings. This is particularly important, as the wood shavings are required to absorb excess moisture released by the food waste during size reduction and decomposition. The composting waste mass material produced after loading and approximately 15 seconds mixing was a very friable, moist, but not-wet mix ideal for in-vessel composting. The composting waste

material mass was also observed to be sufficiently porous to permit adequate air flow during processing. Good air flow through the waste was essential to maintain high oxygen (>15% v/v) conditions for aerobic composting (Australian Standard AS 4454, 1999).

5 The BioCorp™ biodegradable plastic bin liners were very effectively shredded, torn and incorporated into the composting waste material mass. The spikes mounted on the rotating mixing and cutting blades were observed to be largely responsible for shredding or tearing the bags. Notably, no physical evidence of the biodegradable bags was observed, even after a very short retention time of one week.

10 Two column-mounted blades (mounted in the middle of the chamber) were also found to be very effective in mixing and promoting even and consistent flow of composting material through the chamber.

The composted product was found to be easily extracted from the apparatus, being achieved through the sweeping action of a sickle blade mounted close to the bottom of the composting chamber. Compost was swept out of the chamber relatively evenly and into a
15 discharge trolley. Approximately three rotations of the central shaft was required, occurring in approximately five seconds, to extract a 50 L vessel of composted waste product. Although the discharge was very efficient, it is recommended that two vessels be fitted on the trolley to enable quicker extraction of compost by a single operator.

20 Food waste processed over the trial.

Actual quantities of food waste and wood shavings processed during the 7 week trail is shown in Table 4. It should be noted that weekly quantities of food waste were loaded at a maximum frequency of twice per week as it was not possible to do this on a daily basis within the context of the trial.

25 Based on the ratios of food waste to wood shavings, it was calculated that the chamber capacity of the apparatus was found to be suitable for processing approximately 1230 kg of food waste per week. By changing the loading rate per week, the effect on the length of time waste material was were retained and processed in the apparatus could be determined (Table 4).

Table 4. Food waste processed by the apparatus during the trial phase. Note that varying quantities of food waste were added to produce product of various retention times of 1 to 4 weeks to permit an evaluation of the ideal retention time to achieve a given product quality.

5

| Week ending | Planned food waste loading (kg) | Actual food waste loaded (kg) | Actual wood shavings loaded (kg) | Total material loaded (kg) | Approximate retention time of loading in unit (days) | Approximate retention time (weeks) |
|-------------|---------------------------------|-------------------------------|----------------------------------|----------------------------|--|------------------------------------|
| 1 | 1 000 | 979 | 259 | 1 238 | 8.8 | 1.3 |
| 2 | 700 | 751 | 158 | 909 | 11.5 | 1.6 |
| 3 | 500 | 482 | 103 | 585 | 17.9 | 2.6 |
| 4 | 300 | 303 | 61 | 364 | 28.5 | 4.0 |
| 5 | 300 | 300 | 61 | 361 | 28.1 | 4.0 |
| 6 | 300 | 300 | 61 | 361 | 28.1 | 4.0 |
| 7 | 300 | 300 | 61 | 361 | 28.1 | 4.0 |

Weekly batches of the composted product were readily identified following discharge by the presence of plastic markers of different types. Materials were relatively evenly discharged, though the markers were difficult to identify upon discharge from the chamber.

10

Temperature and oxygen profiles in the unit.

Results indicated that the temperature feedback mechanism was effective in maintaining a relatively constant thermophilic temperature and highly aerobic conditions (high oxygen, >15% v/v) within the composting chamber. The pre-set temperature of 50°C was chosen to ensure rapid breakdown of the food waste, though at this temperature, the length of time required for pasteurisation (ie microbial pathogen and weed seed destruction) was extended compared to higher temperatures around 55°C (Miller, 1993, *supra*). Changes in temperature (at probe) and interstitial oxygen concentration (average of three samples taken in cross section in centre of composting chamber) over the 7 week composting trial are shown in Figure 3.

20

During the first three days of processing, temperatures throughout the apparatus

rapidly rose to the set-point due to increasing microbial activity, due to abundant carbon, nitrogen and oxygen present. A rapid rise in temperature is characteristic of well managed composting systems (Miller, 1993, *supra*). The insulation installed in the side walls of the composting chamber was effective in preventing excessive heat loss. The temperature
5 profiles in the top, middle and bottom of the apparatus are shown in Figure 4.

In general, the zone immediately in the vicinity of the central rotatable shaft was on most occasions approximately 3°C cooler than the edge of the composting chamber (Figure 4a), because 50% of the air injected into the composting chamber occurred via the bearing housing at the base of the chamber.

10 Distribution of oxygen in the apparatus was excellent. Due to the higher air flow rates around the central rotatable shaft, good oxygenation of this zone occurred, with oxygen contents mostly above 20% during the trial. Oxygenation of the outer zone of the composting vessel was also considered good, with oxygen concentrations ranging from 20% near the bottom (Figure 4c) to 17% near the top surface of the composting waste
15 material mass (Figure 4a). Better oxygenation of the outer zone of the composting chamber was expected near the base, due to closer proximity to the air injectors installed near the bottom of side wall(s). Evidence suggests that highly aerobic conditions were maintained in the composting chamber, thus preventing the possibility of malodour formation, which can occur when the oxygen concentration drops to below 15% (Australian Standard AS
20 4454, 1999). The absence of malodour during processing was noted in observations of untreated process air discharged direct to atmosphere.

Maintenance of uniform thermophilic temperatures (>45°C) was achieved throughout most of the apparatus, except in approximately the bottom 20%. This is because this zone is in direct contact with the air injectors installed in the side wall and in
25 the bearing housing at the base. Thus, materials in the upper 80% of the composting chamber should be pasteurised before movement into the bottom 20% of the chamber, where slightly cooler temperatures are maintained due to immediate contact with injection air. This is to ensure a sanitised composted product is discharged from the base of the apparatus.

30 To achieve higher temperatures in the composting chamber, the thermostat set-point could be raised to approximately 55°C, which would result in an overall increase in approximately 5°C in the entire composting chamber, thus reducing the time required for

pasteurisation.

Retention time, product quality and maximum processing capacity.

5 A number of samples of the composted product were discharged over the course of the trial to determine quality and level of decomposition, and corresponding retention times. The cost/benefit equation is affected by how much food waste is recycled per unit time, and therefore determination of maximum processing capacity to generate a product of minimal acceptable quality had to be determined.

10 Product discharged after a one week retention time contained no visible food material and had started to turn brown in colour, indicating that the product had been rapidly decomposing. The product discharged was moist, though no free water was released during the squeeze test (Australian Standard AS4454, 1999). A fruit/vegetable odour could be detected from product. The product was also very fine and well textured, having appropriate particle size characteristics to be used as a mulch.

15 Product discharged after 2 and 3 weeks visually appeared to be more humified and decomposed compared to product processed for one week and had less fruit/vegetable odour. Product after four weeks visually appeared to be quite humified, and some earthy odour could be detected from the product, indicating the composting process was nearing completion.

20 Product testing after one week indicated that the product met most of the requirements of a pasteurised mulch according to the Australian Standard AS 4454 (1999). Additional curing in a pile or in perforated containers may be desirable for the composted product to a higher level of stability and pass the requirements as a fully composted mulch product.

25 Air Quality.

Treatment of the discharge air by an activated carbon gas cleaner reduced the detectable levels of volatile organic carbon compounds in the air, which contribute to odour formation. Whilst the air discharged by the gas cleaning unit was not odourless, the slight odours present were similar to cooked food, which were found to dissipate rapidly
30 in the surrounding atmosphere to undetectable levels. At no time were odours offensive, which typically occurs under anaerobic conditions (eg hydrogen sulfide and volatile fatty acids).

Also, at no time was malodorous air discharged by the gas cleaning unit into the surrounding atmosphere, and as a result, no pests or insects were seen to be attracted to the apparatus.

Condensate collected below the activated carbon filtration chamber, however,
5 needed to be tapped off and either collected in a plastic vessel or discharged direct to sewer. Alternatively, this condensate could be recycled in the apparatus by adding it with an appropriate amount of wood shavings so as to avoid leachate formation.

CONCLUSION

10 The performance evaluation of the apparatus revealed that the technology could process efficiently up to 1200 kg of food waste per week based on a retention time of one week. Size reduction, mixing and aeration systems performed efficiently to allow the controlled decomposition of food waste with wood shavings into a composted waste material product. Product discharged after a one week retention time was partly mature
15 and passed most of the requirements of a pasteurised mulch as defined in AS 4454(1999).

It will be appreciated by persons skilled in the art that numerous variations and/or modifications may be made to the invention as shown in the specific embodiments without departing from the spirit or scope of the invention as broadly described. The present
20 embodiments are, therefore, to be considered in all respects as illustrative and not restrictive.

Claims:

1. A composting system including a generally vertically-orientated vessel comprising a top wall, base wall and side wall(s) defining an interior vessel space. The composting system includes a range of mechanisms attached to a vertically oriented
5 central rotating shaft, preferably including rotatable size reduction blade(s), agitation mechanism(s), and discharge blade/mechanism(s). The composting system includes internal size reduction means for reducing the size of waste and/or organic material introduced to the vessel. The composting system includes a loading hatch through which material may be introduced into the vessel, a discharge hatch
10 through which material may be removed from the lower region of the vessel, and a source of air to maintain aerobic conditions within said vessel. When the apparatus is in use, material introduced to said vessel moves from the upper region of the vessel through a zone of size reduction to the lower region of said vessel gravitationally and via agitation. Process conditions within the vessel are controlled
15 via intervention by an operator and via electronic control mechanism, which can monitor operating conditions such as temperature and loading rate (for example), to manage air injection, mechanical agitation and size reduction such that composting proceeds efficiently and at an optimal rate.
- 20 2. A composting system as claimed in claim 1 wherein the vessel is generally orientated vertically and is constructed of any suitable material, but is preferably constructed internally of stainless steel or like corrosion-resistant material. The walls, and particularly the side wall(s), are preferably insulated so as to retain heat generated by aerobic composting of introduced waste material.
- 25 3. A composting system as in claim 1 or claim 2 wherein all materials loaded into the unit pass through a zone of size reduction. The size reduction means also assists in the thorough mixing of the introduced material. The apparatus is preferably arranged so that all waste material must pass through the size reduction means
30 when passing from the upper region to the lower region of the vessel.

4. A composting system as claimed in any of the preceding claims wherein the size reduction means is located internal to the composting vessel, and preferably comprises a plurality of "blades" or cutting edges. The blades do not necessarily need to be sharp as the size reduction may be achieved through mechanical shearing and tearing. The blades may therefore take the form of flat bars, preferably but not necessarily with bevelled edges and/or sharp edges. Preferably, at least one of the blades or cutting edges is adapted for movement (eg by generally horizontal rotation). More preferably, the size reduction means comprises a number of horizontally rotatable blades, preferably associated with a number of fixed horizontally disposed blades. The blades or cutting edges may be constructed of any suitable material, but are preferably constructed of stainless steel or like corrosion-resistant material.
5. A composting system as claimed in claim 1 where the material can be fed into the apparatus continuously or semi-continuously generally into the top of the vessel and discharged generally from the bottom of the vessel after the required residence (processing) time.
6. A composting system as claimed in any of the preceding claims wherein the chamber contains a loading hatch that may be located in the side wall(s) adjacent to the top wall, but more preferably, is located in the top wall (ie. roof) of the vessel. Preferably, the loading hatch, when closed, forms an air-tight seal to prevent escape of any odourous gas or "process air" from the vessel.
7. A composting system as claimed in any of the preceding claims wherein the discharge hatch may be located in the side wall(s) adjacent to the base wall, but more preferably, is located in the base wall of the vessel. Preferably, the discharge hatch, when closed, forms an air-tight and liquid seal to contain and/or prevent escape of any odourous gas, process air and liquids (ie leachates) from the vessel.
8. A composting system as claimed in any of the preceding claims wherein the apparatus (ie. vessel) is provided with a source of air containing oxygen (eg compressed air), to maintain aerobic conditions within the vessel. Air supply may be controlled via manual intervention by the operator, and more preferably automatically operated via a timer and/or other suitable electronic control mechanism such as temperature sensor(s) within the vessel.

9. A composting system as claimed in any of the preceding claims wherein the apparatus is provided with at least one outlet, to discharge odourous gas or process air from within the vessel. This process air may be discharged to the atmosphere or treated via an odour scrubber (or equivalent) to remove any odourous gases.
10. A composting system as claimed in any of the preceding claims wherein a centrally mounted and generally vertical rotatable shaft is located within the vessel. A range of mechanisms are attached to this central rotating shaft, preferably including rotatable size reduction blade(s), agitation mechanism(s), discharge blade/mechanism(s). The centrally located shaft being mounted in a generally vertical arrangement, causing the attached mechanisms to rotate in a generally horizontal plane with rotation of the shaft.
11. A composting system as claimed in claim 10 wherein the rotation of the centrally mounted shaft is driven by any suitable means (eg electric or other drive motor), and may be controlled via manual intervention by the operator, and more preferably automatically operated via a timer and/or other suitable electronic control mechanism.
12. A composting system as claimed in claim 10 or in claim 11 wherein one or more mixing blades or bar(s) may be mounted to the central shaft to agitate the material in the vessel to ensure even and consistent flow of materials through the vessel.
13. A composting system as claimed in claim 10 or in claim 11 wherein one or more sweeper blades or bar(s) may be mounted to the central shaft adjacent to the internal base wall of the vessel to agitate and/or sweep the material in the lower portion of the vessel towards and out of a discharge hatch.
14. A composting system as claimed in any of the preceding claims wherein the drive motor preferably operates the rotatable shaft both in a clockwise and anti-clockwise direction, and all rotating bars and blades are preferably symmetric in plan view to allow for effective action in both directions.

15. A composting system as claimed in any of the preceding claims wherein materials loaded into the unit via the loading hatch may be loaded manually by an operator,
5 and more preferably automatically loaded via a suitable mechanical lifting apparatus powered via electrical or other drive motor.
16. A composting system as claimed in claim 1 preferably as substantially hereinbefore described with reference to the accompanying drawings.

Figure 1

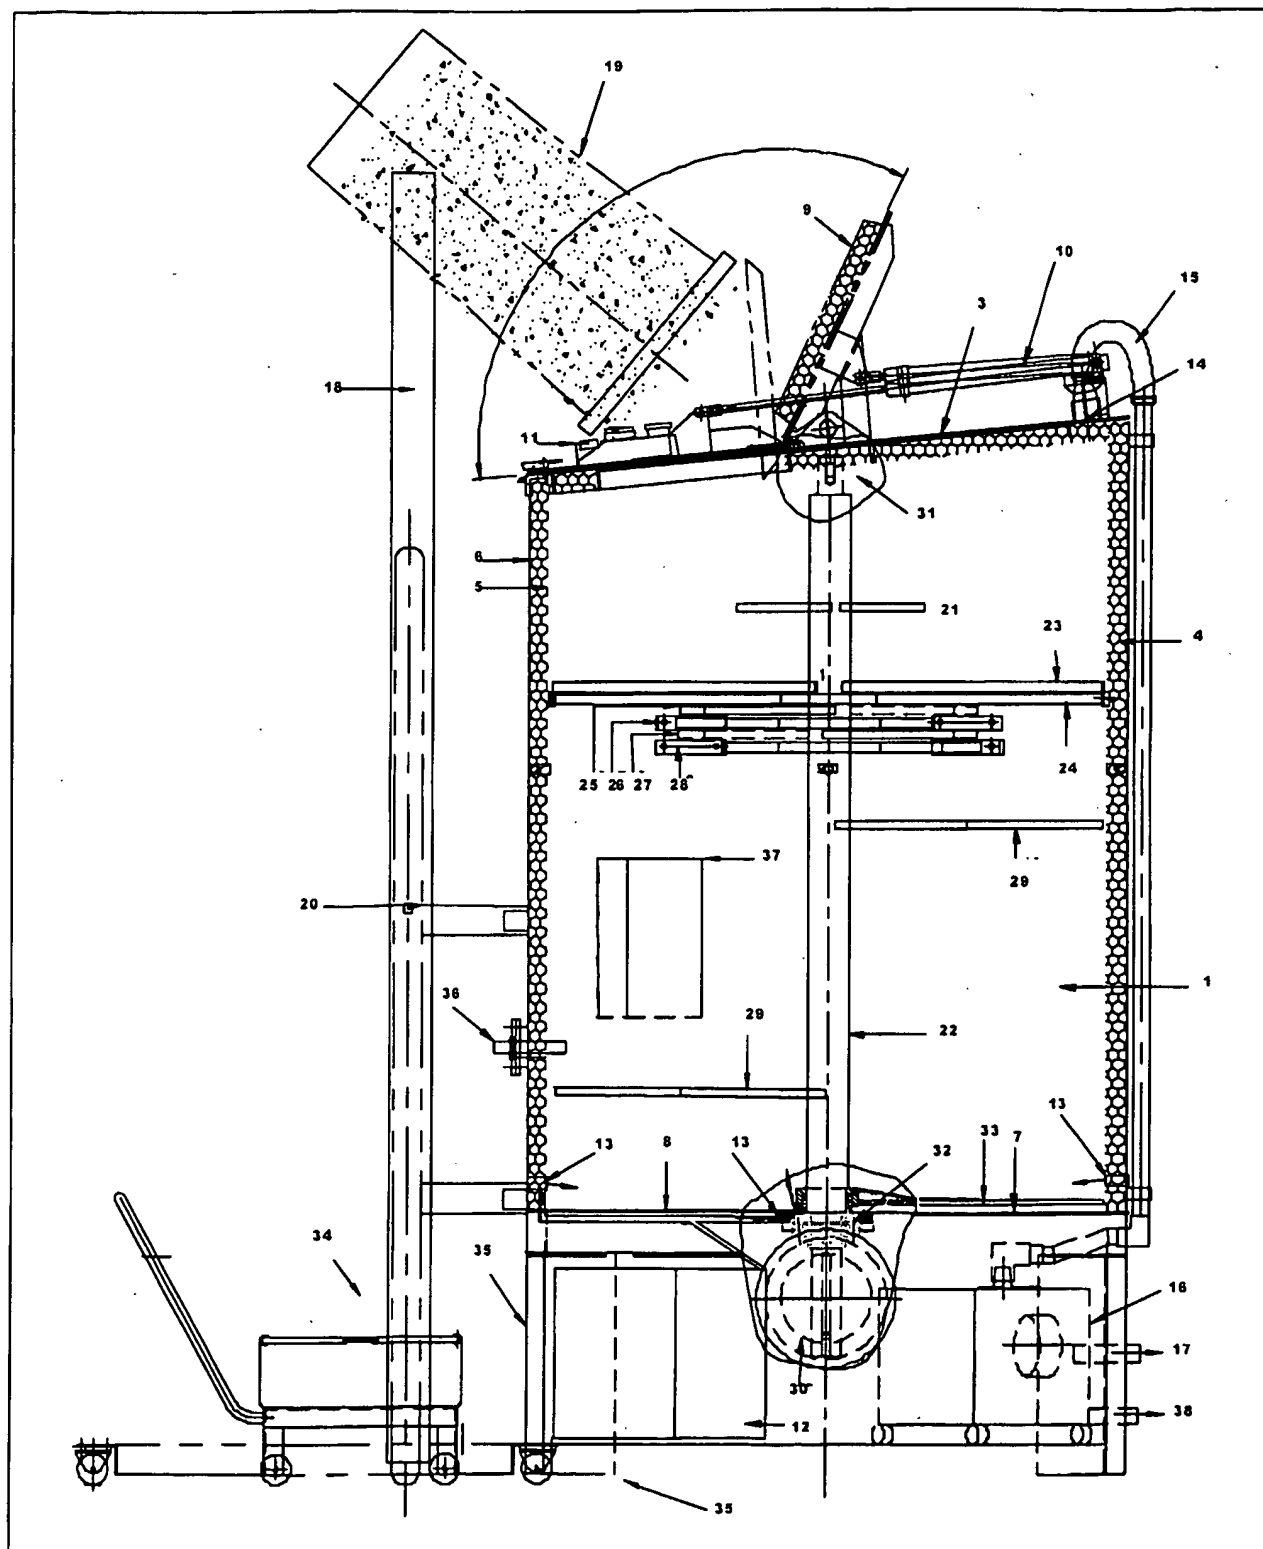


Figure 2

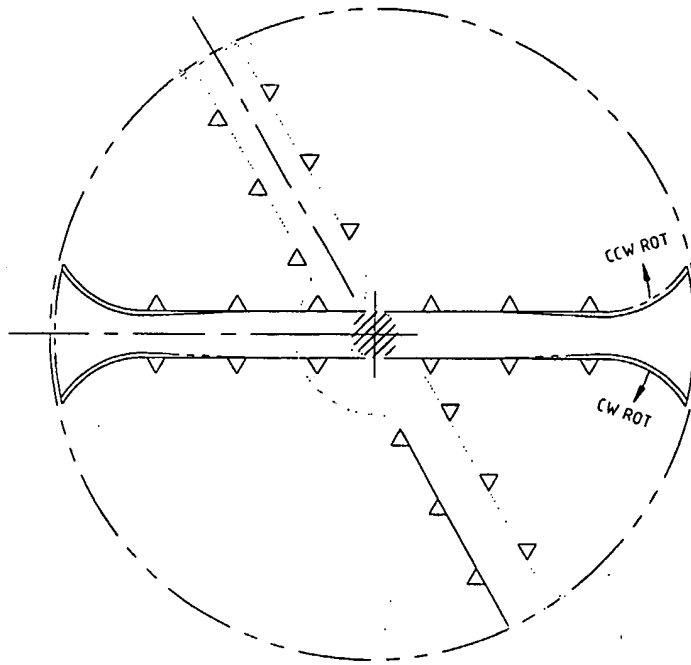


Figure 3


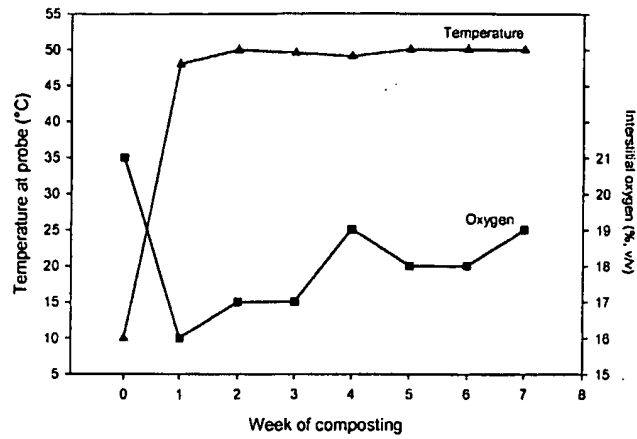


Figure 4

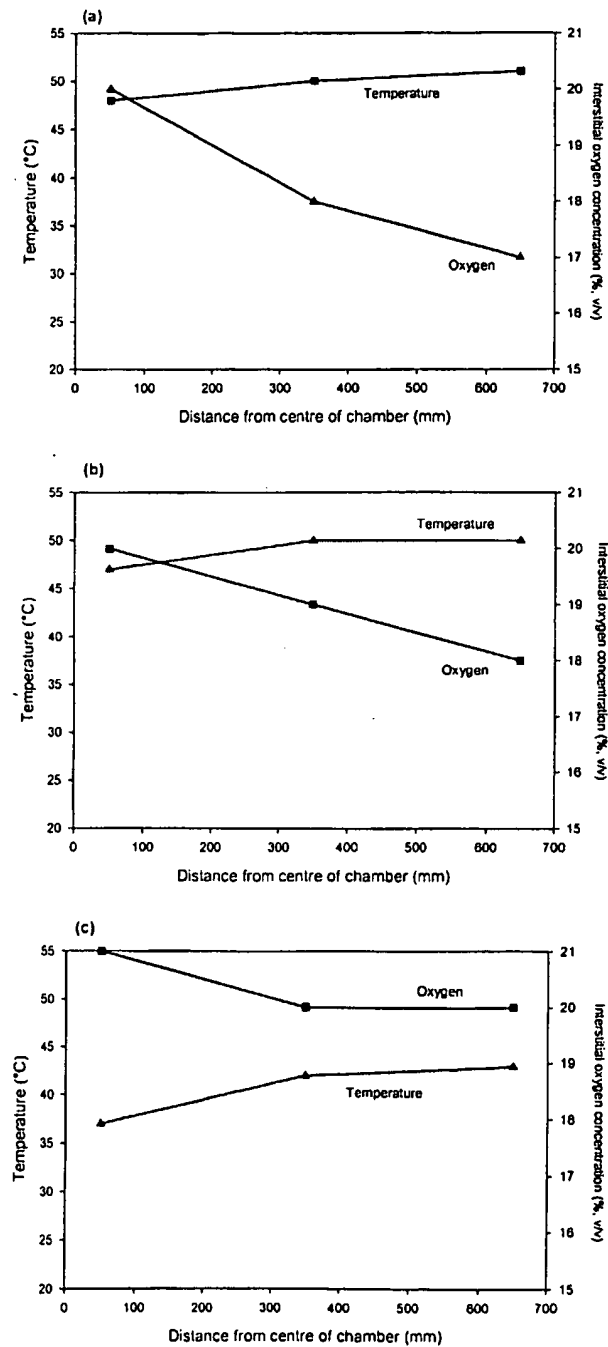

| | | | | | |
|--|---|---|---|---|--|
| A. CLASSIFICATION OF SUBJECT MATTER | | | | | |
| Int. Cl. ⁷ : C05F 9/02, C05F 17/02 | | | | | |
| According to International Patent Classification (IPC) or to both national classification and IPC | | | | | |
| B. FIELDS SEARCHED | | | | | |
| Minimum documentation searched (classification system followed by classification symbols) | | | | | |
| Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched | | | | | |
| Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WPAT, IPC marks C05F 9/02, C05F 17/02 with keywords comminut+, shred+, chop+, grind+ | | | | | |
| C. DOCUMENTS CONSIDERED TO BE RELEVANT | | | | | |
| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. | | | |
| X | EP 676 385 B1 (KABUSHIKI KAISHA ENVIRONMENTAL ENGINEERING LABORATORY) 10 February 1999 See paragraph [0043] and following | 1 - 16 | | | |
| X | Derwent Abstract Accession No. 1999-496778/42, Class D15 (D16), JP 11199356 A, (UEDA H) 27 July 1999 See whole abstract | 1 - 16 | | | |
| A | DE 41 37 909 A1 (HESS, HERMAN) 19 May 1993 See whole document | | | | |
| <input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex | | | | | |
| <table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </td> <td style="width: 33%; vertical-align: top;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </td> <td style="width: 33%;"></td> </tr> </table> | | | <p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> | <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> | |
| <p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> | <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> | | | | |
| Date of the actual completion of the international search 5 November 2003 | | Date of mailing of the international search report 12 NOV 2003 | | | |
| Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustalia.gov.au Facsimile No. (02) 6285 3929 | | Authorized officer DAVID GRIFFITHS Telephone No : (02) 6283 2628 | | | |

| C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT | | |
|---|--|-----------------------|
| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| A | WO 99/03799 A1 (WILLSON BROWN ASSOCIATES LIMITED) 28 January 1999 Page 2, line 23 to page 3 line 26, page 9, lines 16 to 25 | |
| A | Derwent Abstract Accession No. 2001-229183/24, Class D16, JP 2001002483 A, (NAKASAKU KK) 9 January 2001 See whole abstract | |
| A | WO 00/02832 A1 (INTERNATIONAL COMPOST DEVELOPMENT AB) 20 January 2000 See page 6 line 10 to page 7 line 6. | |

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

| Patent Document Cited in Search Report | | | Patent Family Member | | | | |
|---|---------|------|----------------------|----|---------|----|------------|
| WO | 9903799 | AU | 86526/98 | BR | 9811794 | EP | 1025064 |
| | | NO | 20000238 | NZ | 503335 | US | 2003082796 |
| | | ZA | 9806452 | | | | |
| DE | 4137909 | NONE | | | | | |
| EP | 0676385 | JP | 7275828 | US | 5534042 | | |
| WO | 0002832 | AU | 49408/99 | EP | 1115678 | | |
| END OF ANNEX | | | | | | | |

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.